


# Line-Mounting Body, Size 12

Type: 12 Series - 4-Way

## 1 Technical data

Ordering code	Description	Material	Maximum operating pressure	Weight	Port 1	Port 2	Port 3	Port 4
04BA	30182	Aluminium	3000 psi [210 bar]	2.152 lbs [0.98 kg]	G 1/2" -14 BSPP	G 1/2" -19 BSPP	G 1/2" -14 BSPP	G 1/2" -14 BSPP
04BS	30188	Steel	5000 psi [350 bar]	6.270 lbs [2.85 kg]	G 1/2" -14 BSPP	G 1/2" -19 BSPP	G 1/2" -14 BSPP	G 1/2" -14 BSPP
06BA	30183	Aluminium	3000 psi [210 bar]	2.025 lbs [0.92 kg]	G 3/4" -14 BSPP	G 3/4" -14 BSPP	G 3/4" -14 BSPP	G 3/4" -14 BSPP
06BS	30189	Steel	5000 psi [350 bar]	5.900 lbs [2.68 kg]	G 3/4" -14 BSPP	G 3/4" -14 BSPP	G 3/4" -14 BSPP	G 3/4" -14 BSPP
10TA	30184	Aluminium	3000 psi [210 bar]	2.116 lbs [0.96 kg]	SAE-10	SAE-10	SAE-10	SAE-10
10TS	30190	Steel	5000 psi [350 bar]	6.162 lbs [2.80 kg]	SAE-10	SAE-10	SAE-10	SAE-10
12TA	30185	Aluminium	3000 psi [210 bar]	2.000 lbs [0.91 kg]	SAE-12	SAE-12	SAE-12	SAE-12
12TS	30191	Steel	5000 psi [350 bar]	5.822 lbs [2.64 kg]	SAE-12	SAE-12	SAE-12	SAE-12

## 2 Dimensions & sectional view

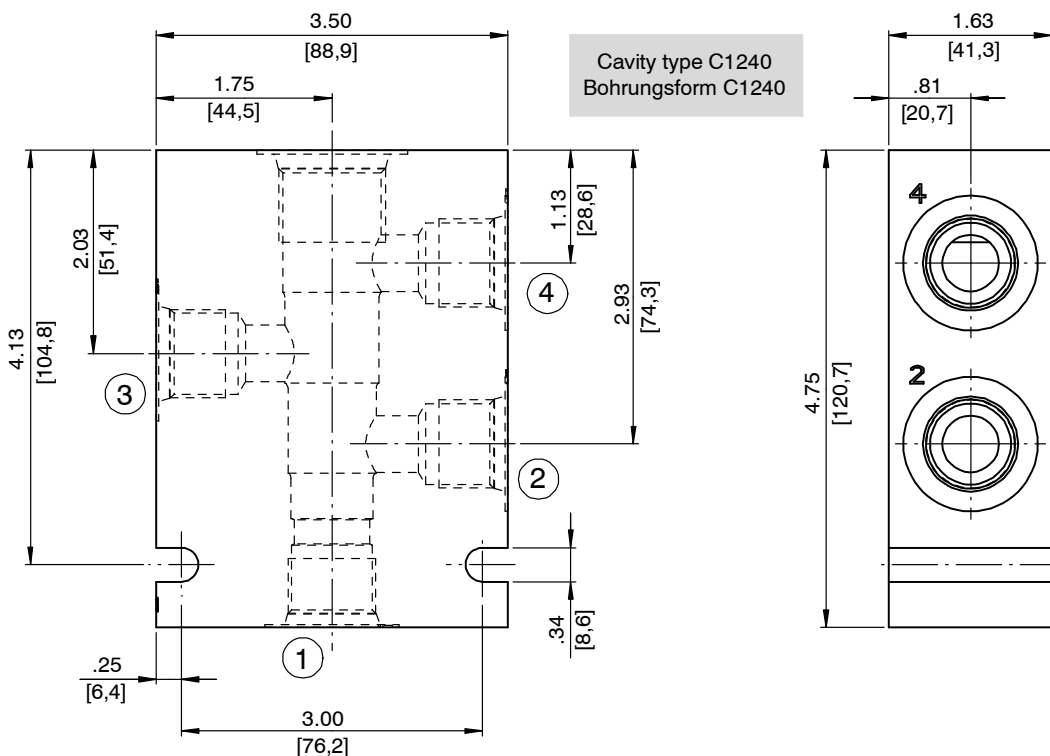

Reference: 520-P-000431-EN-01

### 3 Related data sheets

Reference	(Old no.)	Description
520-P-000430	(0-043.0)	Cavity type C1240

[info.el@bucherhydraulics.com](mailto:info.el@bucherhydraulics.com)

[www.bucherhydraulics.com/commoncavity](http://www.bucherhydraulics.com/commoncavity)

© 2015 by Bucher Hydraulics, Inc., 2545 Northwest Parkway, Elgin, Illinois 60124, USA

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.

Classification: 430.395.-.-.-.