
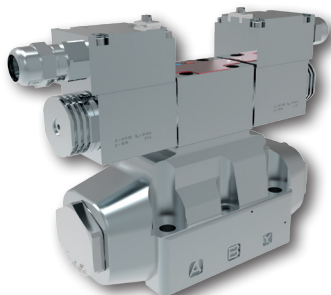


**Explosion-proof, 4/2 and 4/3 Directional Control Valve, Pilot Operated**
**RNEXH5-16**


 Size 16 (D07) •  $Q_{max}$  300 l/min (80 GPM) •  $p_{max}$  350 bar (5100 PSI) / 420 bar (6100 PSI)

**Technical Features**

- › Directional control valve, internally or externally pilot operated with mounting interface acc. to ISO 4401, DIN 24340 (CETOP 07)
- › Driven by an ISO 4401-03 (CETOP 03) solenoid operated directional valve
- › High transmitted hydraulic power, optimized design to minimize the pressure drop
- › Flexibly changed from internal pilot or drain to external by inserting or removing threaded plugs in the main control valve body
- › Wide range of interchangeable spools and valve controls available
- › Soft-shift, spool speed, main stroke limiter control options
- › In the standard version, the valve housing is zinc-coated for 520 h protection acc. to ISO 9227

**ATEX/IECEx Classification**

The valves equipped with explosion-proof solenoids are available with following certifications and protection modes:

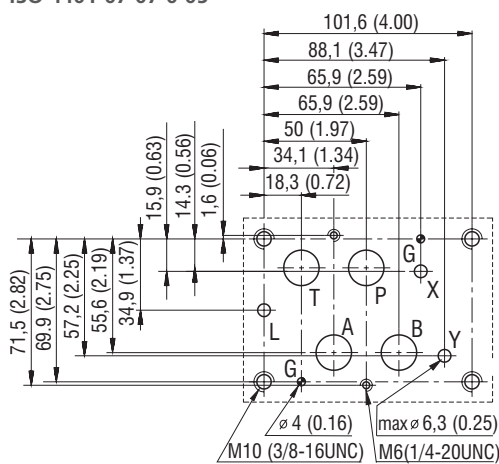	EPS14ATEX1744 X	IECEx EPS14.0064 X
AC	I M2 Ex mb I Mb	Ex mb I Mb
	II 2G Ex mb IIB T4, T5, T6 Gb	Ex mb IIB T4, T5, T6 Gb
	II 2D Ex mb IIIC T135°C, T100°C, T85°C Db	Ex mb IIIC T135°C, T100°C, T85°C Db
DC	I M2 Ex e mb I Mb	Ex e mb I Mb
	II 2G Ex e mb IIB T4, T5, T6 Gb	Ex e mb IIB T4, T5, T6 Gb
	II 2D Ex tb IIIC T135°C, T100°C, T85°C Db	Ex tb IIIC T135°C, T100°C, T85°C Db

**ISO 4401-07-07-0-05**

 Ports P, A, B, T max  $\varnothing$  17.5 mm (0.69 in)

**Technical Data**

Valve type		RNEX*5-16	RNEX*5H-16
Valve size		16 (D07)	
Max. flow		300 (80)	
Max. operating pressure at port P, A, B		350 (5080)	420 (6090)
- at port T (external drain)		210 (3050)	350 (5080)
- at port T (internal drain)		210 (3050)	
Minimum pilot pressure		bar (PSI) 12 (174)	
Maximum pilot pressure		bar (PSI) 210 (3050)* 350 (5080)*	
Fluid temperature range (NBR)		°C (°F) -30 ... +80 (-22 ... +176)	
Fluid temperature range (FPM)		°C (°F) -20 ... +80 (-4 ... +176)	
Ambient temperature range		°C (°F) -30 ... +50 (-22 ... +122)	
Supply voltage tolerance		AC: $\pm$ 10	DC: $\pm$ 10
Max. switching frequency		1/h 10 000	
Enclosure type acc.to EN 60529		IP 65	
Switching time at $v=32$ mm <sup>2</sup> /s (156 SUS)	ON	AC: 60 ... 80**	DC: 50 ... 70**
	OFF	AC: 60 ... 80**	DC: 60 ... 80**
Weight	RNEXH5-162	9.1 (20.1)	
	RNEXH5-163	10.6 (23.4)	
Data Sheet		Type	
General information		GI_0060	Products and operating conditions
Mounting interface / tolerances		SMT_0019	Size 16
Spare parts		SP_8010	

\* For higher system pressure use option „Z“

 \*\* The values indicated refer to a solenoid valve working with a pilot pressure of 100 bar (mineral oil, temperature = 50°C, viscosity = 36 mm<sup>2</sup>/s, P - A and B - T connected).

**Installation Note:**

- It is necessary to ensure minimum pilot pressure, therefore either external piloting or option C3 (check valve in P port) must be used for spools which have connection between P and T ports (C11, H11, X21, R21, J19).
- Attention: spools J15, J19 may assume an undefined position without energy supply.
- Other special versions are available. Consult our technical department.

### Ordering Code

**RNEXH** [ ] -16 [ ] [ ] / [ ] [ ] [ ] / [ ] [ ] [ ] [ ] [ ] - [ ]

**Explosion-proof 4/2 and 4/3 directional control valve, internally and externally pilot operated**

**Design series**  
standard 350 bar  
high pressure 420 bar (not available for C11 spools)

**Valve size**  
ISO 4401-07-07-0-05 (CETOP 07)

**Number of valve positions**  
two positions  
three positions

**Spool symbols**  
see the table „Spool Symbols“

**Control Options**  
without additional features  
main spool stroke limiter  
main spool shifting speed control  
shifting speed control, with orifice (0.8 mm)  
in port P of solenoid pilot valve

**Piloting**  
internal  
internal with installed pressure reducing valve, fixed 30 bar setting  
external

**Surface treatment**  
zinc-coated (ZnNi), ISO 9227 (520 h)

**Seals**  
NBR

**Manual override on pilot valve**  
No designation standard  
N7 detent assembly  
N9 without manual override

**Cable length**  
No designation (only for DC) without cable  
3 (AC and DC Version) 3000 mm  
8 (AC and DC Version for request) 8000 mm

**Temperature class - Solenoid nominal power**  
A4 Class T4 - 10 W  
A6 Class T6 (T5) - 10 W

**Connection box + Cable gland**  
12 V DC / 0,75 A  
24 V DC / 0,39 A  
48 V DC / 0,19 A  
110 V DC / 0,094 A


**AC voltage 50/60 Hz**  
Fix Installed cable  
110 V AC / 0,112 A  
230 V AC / 0,052 A

**Check valve incorporated in P-line**  
No designation none  
C3 with back pressure check valve

**Drain**  
external  
internal

**No designation**  
I

### Pressure drop related to flow rate

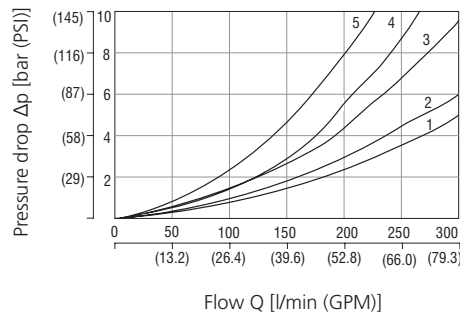

	Spool position	P-A	P-B	A-T	B-T	P-T
Z11	Energized	1	1	3	4	
H11	Energized	1	1	4	4	
	De-energized					2
Y11	Energized	1	1	4	4	
	De-energized			4	4	
C11	Energized	2	2	4	5	
	De-energized					4
R11, R21		1	1	3	4	
X11, X21		1	1	4	4	
J15, J19		1	1	3	4	


### Spool Symbols

Three positions with centering spring			Two positions with return spring		
Z11			X11		
H11			X21		
Y11			R11		
C11			R21		
Z41			Two positions with mechanical detent on pilot valve		
Z22			J15		
			J19		

## Pilot and Drain

The RNEXH valves are available with pilot and drain, both internal and external.

Type of valve		Plug assembly	
		X	Y
RNEXH5-16**/*	internal pilot and external drain	NO	YES
RNEXH5-16**/*I	internal pilot and internal drain	NO	NO
RNEXH5-16**/*E	external pilot and external drain	YES	YES
RNEXH5-16**/*EI	external pilot and internal drain	YES	NO

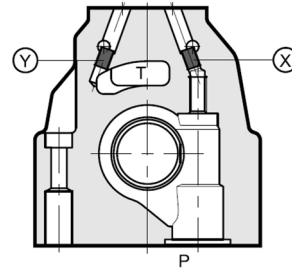



plug M6x8

X: for external pilot, Y: for external drain

## Check Valve Incorporated in Line P

### Check valve incorporated in line P: C3


Valves RNEXH are available with a back pressure valve incorporated on line P (Type „C3“). This is necessary to obtain the piloting pressure when the valve (in the rest position) has the line P connected to the port T (spools H11, C11, X21, R21, J19). The cracking pressure is 5 bar with a minimum flow rate of 15 l/min.

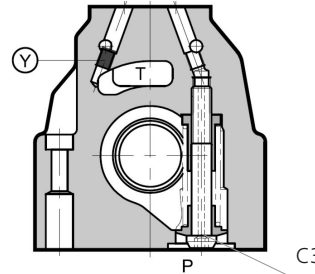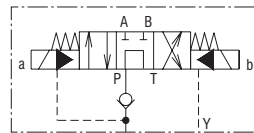

pilot always internal

Y: plug M6x8 for external drain

Back pressure valve incorporated on line P (type C3)

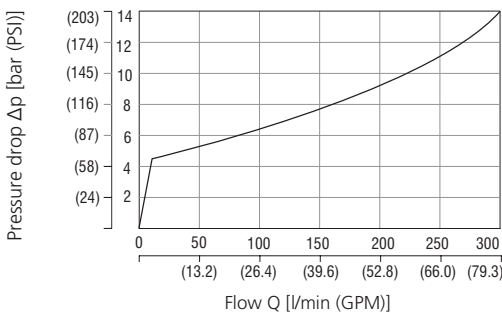

The curve refers to the pressure drop (body part only) with back pressure valve energized to which the pressure drop of the reference spool must be added.



**In the C3 version the piloting is always internal.**

**The back pressure valve can't be used as a check valve because it doesn't guarantee sealing.**


The back pressure valve can be also delivered separately and it can be easily mounted on line P of the main control valve. Specify the code to order the back pressure valve separately from the spare part data sheet No. 8010.

For detail information on the pilot valve RPEX3-06 refer to data sheet No. 4054.

## Actuation in millimeters (inches)

### Solenoid control: RNEXH

The valve is supplied with an RPEX3-06 pilot solenoid valve.

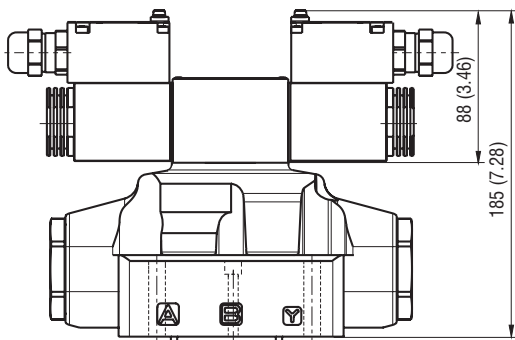

The minimum piloting pressure can be as low as 5 bar at low flow rates, but with higher flow rates a pressure of 12 bar is needed.

If the valve operates with higher pressures it is necessary to use the version with external pilot and reduced pressure. Otherwise, the valve with internal pilot and a pressure reducing valve with a 30 bar fixed setting can be ordered.

### Control Options - Special Features

#### Control of the main spool shifting speed: D

By placing a flow control valve between the pilot solenoid valve and the hydro-piloted valve, the pilot flow rate can be controlled and therefore the shifting speed adjusted. Add the letter **D** to the identification code to request this device.

#### Pilot pressure reducing valve - 30 bar fixed setting: Z



Internal piloting with mounted pressure reducing valve with 30 bar fixed setting. The option **Z** may be used together with option **D**.

#### Control of the main spool stroke: C

Using special side plugs, it is possible to introduce stroke control the piloted valve so as to vary the maximum spool opening clearance. This solution allows the control of the flow rate from the pump to the actuator and from the actuator to the outlet, resulting in double adjustable control of the actuator. Add the letter **C** to the identification code to request this device.

#### Shifting speed control: PF

with an orifice (0.8 mm) in port P of the solenoid pilot valve  
Add **PF** to the identification code to request this device


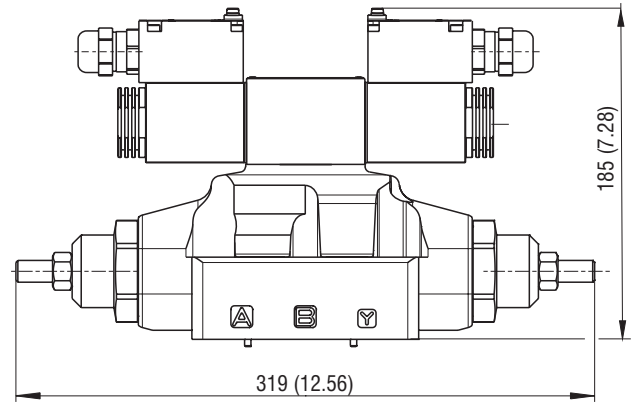
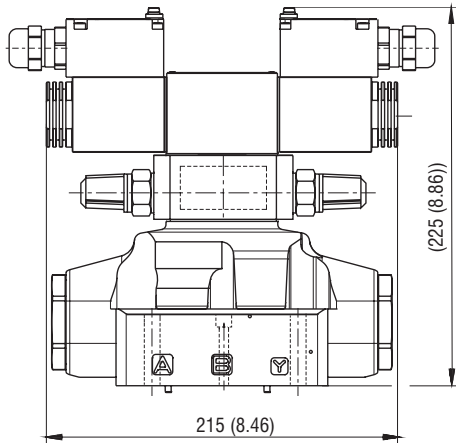


#### Solenoid operated distributor with pilot valve in the configuration 3H11

It is possible to deliver the solenoid operated distributor with the pilot valve in configuration 3H11 (all the ports at the outlet). This configuration is used with external piloting in order to allow the unloading of the piloting line when the solenoid operated valve is in the rest position. With this option, the piloting is necessarily external.

### Dimensions in millimeters (inches)

#### RNEXH5-163

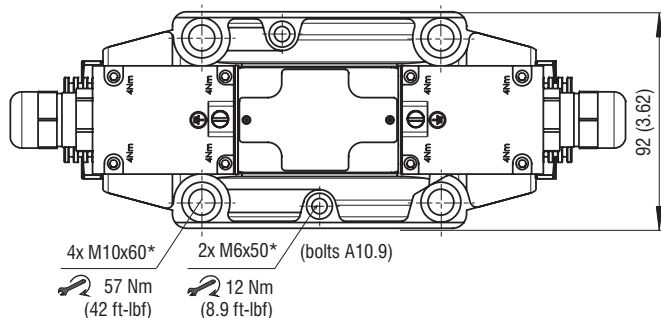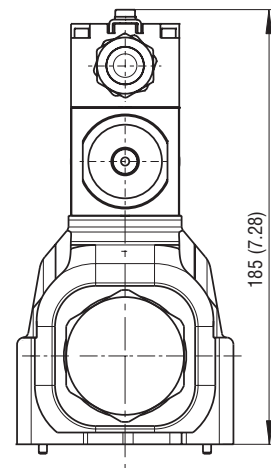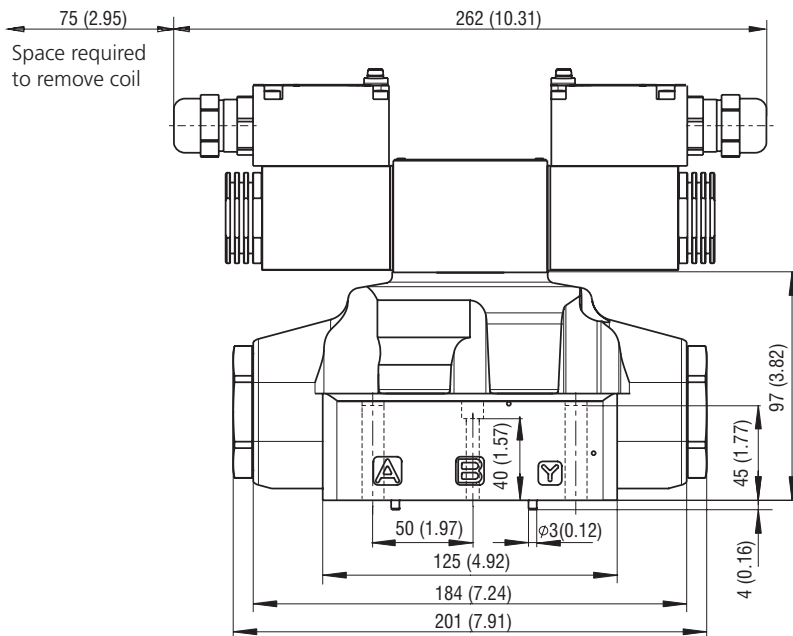

mounting hole threads: M6 x12 (1/2-13 UNC)  
M10x20 (1/2-13 UNC)

\*bolts not supplied